

Acrylicon® Flake System

Description

The Acrylicon Flake System is 2 mm to 3 mm thick and contains decorative flakes within its chemically bonded coating system.

The unparalleled long-lasting system is aesthetically versatile and primarily designed for heavy foot traffic and moderate industrial environments. By using our unique Granito blends of color flakes, we are able to provide granite or marble style floors in a fraction of the time normally associated with the traditional systems. Acrylicon Flake System can also be delivered with antibacterial protection.



Uses

Designed for heavy foot traffic and medium industry. The Acrylicon Flake System is the best solution for supermarkets, shopping centers, retail, hospitals, stadiums, schools, mass-transit and bathrooms.

Cure time

The AcryliCon Systems are fully chemically cured two hours after installation and may be actively used by the customer.

Cleaning and Maintenance

Clean regularly using mechanical Scrubber/Dryer type equipment. Cylindrical machines with built in vacuum are best suited. Combine with degreaser or Acrylicon Cleaning Solution. Due to Acrylicon's unique ability to chemically bond, any repairs needed due to damage or extensions, can be effected throughout the life of the floor. Contact your AcryliCon office for advice.

Life Expectancy

In excess of 20-30 years, according to our clients statement, subject to correct installation condition, substrate preparation and maintenance regime.

Specification

Product: Acrylicon Flake/Granito System

Finish: Satin

Thickness: 2-3mm

Colour: Multiple Choices, Standard and customized

Preparatory work and application in accordance with suppliers instructions.

Supplier: AcryliCon Polymers GmbH

www.acrylicon.com

 **ACRYLICON®**
Industrial Flooring

- because the world is a tough place

Acrylicon® Flake System

Substrate

Thorough visual inspection of the current areas, evaluation and preparation of the concrete is required to ensure the longevity of an industrial floor and an optimal bond to the underlying concrete.

The concrete must be C25/>3,800 psi quality or better. The concrete surface must demonstrate sufficient consistency of strength and quality without fine aggregates in the surface (i.e. latency). The surface must be homogeneous, free from loose particles and dirt, and free of oil and dust, before the installation of the floor may commence. The moisture in the subfloor must be no more than 5% by weight and no moisture migration from the ground must occur. AcryliCon must be informed of your subfloor specifications, in particular if the floor is treated with chemicals or contains additives, which may affect the curing process and installation. The floor and room should have a minimum temperature of +5°C/+41°F and a maximum temperature of +27°C/80°F.

AcryliCon recommends trial applications before installations. On any trial areas, bond testing, substrate cleanliness (contamination), substrate surface hardness, porosity, and moisture condition evaluation should be performed to assure integrity of the substrate preparation effectiveness, coating bond, and finished appearance.

Properties and application

Acrylicon Primer, Body- and Top coat resins are transparent, solvent- and VOC- free, medium viscous, non yellowing, non-toxic, 2 component modified methyl-methacrylate resins. Acrylicon Flake System Body Coat is a slightly elasticised resin predominantly recommended for sprinkling coloured flakes (loosely or saturated) and for smooth universal shades. Acrylicon Flake System Top Coat is used as a colourless, wear resistant sealer and top coat. The curing time is about 1 hour at 20°C/68°F (ambient).

Please visit our web site: www.acrylicon.com for your nearest AcryliCon office.

Technical Information

The technical properties of your AcryliCon Floor are based on DIN/ASTM testing and the results are average values delivered under proper installation procedures and conditions.

The supplier is not liable for possible property changes of the AcryliCon Systems caused by hot water loads at 68°C/155°F and above and/or thermal shock (rapid temperature variations).

Compressive Strength (DIN1164 - ASTM C109,C39):
84.ON/mm.sq./12,180 psi

Tensile Strength in bending (DIN 1164 - ASTM D638):
37N/mm.sq./5,655 psi

Modulus of Elasticity (DIN53457 – ASTM C469):
3160 N/mm.sq. /4,350 psi


Water Absorption 4 days (DIN53495 – ASTM D570):
less than 0.1%

Elongation at Fracture (DIN53445): 43%

Temperature Resistance:
Sustained resistance up to 680C/1540F

Chemical Resistance:
Good to most Acids, Alkalis, Oils and Fats, Solvents and Organics, see separate chemical resistance list.

Slip Resistant (SCOF-ASTM C-1028):
Dry: 0,84 With AluOxide: Dry: 1,14
Wet: 0,85 With AluOxide: Wet: 1,10

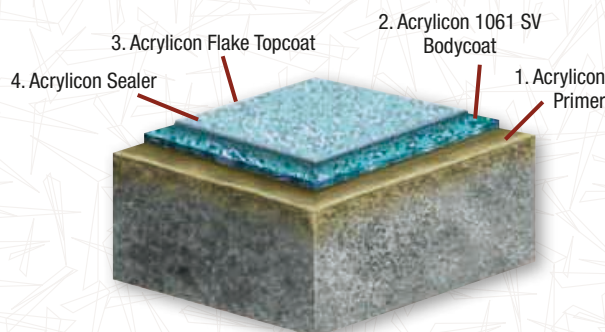

Disclaimer

This information and all further technical advice are based on intensive research and many years of experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make technical alterations during the course of further development. The customer is not released from the obligation of checking our data and recommendations for the suitability of their own particular application. Performance of the product described herein should be verified by testing, which we recommend be carried out only by qualified experts in the sole responsibility of the customer.



ACRYLICON®
Industrial Flooring